



SIGNAGE PANEL WILL ALWAYS BE LOCATED ADJACENT TO THE LATCH SIDE OF THE DOOR, LEFT OR RIGHT.

WHEN THE RIGHT DOOR IS THE ACTIVE DOOR, SIGN SHOULD BE LOCATED TO THE RIGHT SIDE OF THE JAMB.

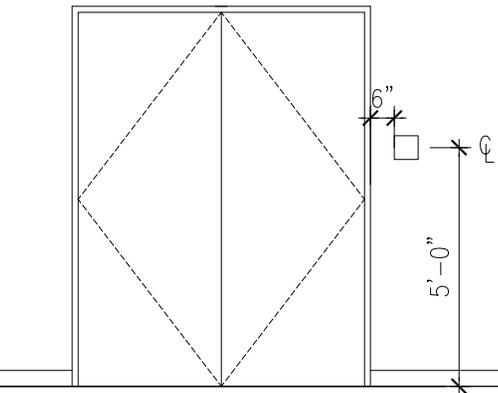

SIGN MOUNTING FOR DOUBLE DOORS

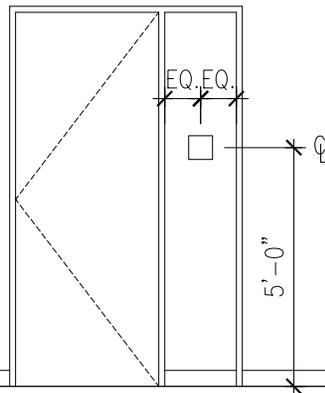


SIGN MOUNTING FOR SIDE LIGHT 18" OR LESS - CENTER SIGN ON GLASS

SIGN MOUNTING STANDARDS

1/4"=1'-0"


DHS003

NOTE: SIGNAGE INSTALLER RESPONSIBLE FOR ALL SIGNS TO BE MOUNTED PER ADA COMPLIANCE. THESE DRAWINGS ARE FOR REFERENCE ONLY.

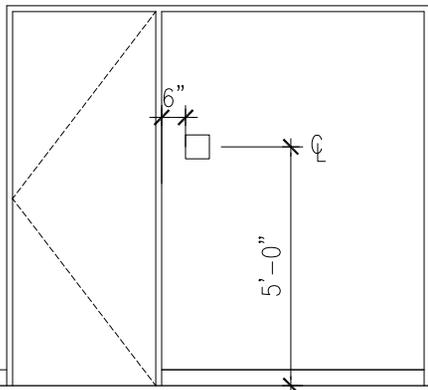

WHEN A WINDOW WALL IS PART OF THE DOOR FRAME, SIGN PANEL TO BE MOUNTED TO GLASS FACE W/ PRESSURE SENSITIVE TAPE, BACK PANEL THE SAME SIZE AS THE FACE PANEL MOUNTED TO OTHER SIDE OF GLASS.


SIGN MOUNTING FOR GLASS PANEL ADJACENT.

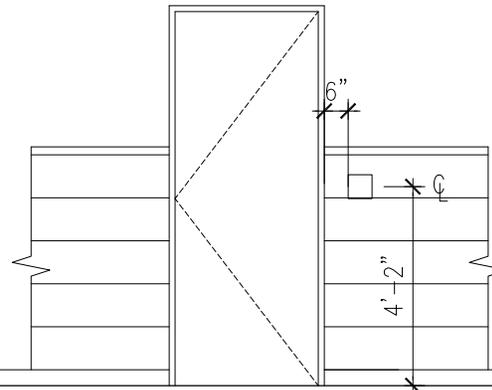

WHEN THERE IS A CHANGE IN THE WALL SURFACE MATERIAL AND OR MOULDING AT OR NEAR THE 60" HEIGHT, THE CENTERLINE OF THE SIGN CAN BE LOWERED, BUT NOT LESS THAN TO 50". THE SIGN SHOULD NOT BE INSTALLED ABOVE THE 60" CENTER LINE. THE SIGNS MUST BE OF A CONSISTENT HEIGHT THROUGH-OUT THE BUILDING.


SIGN MOUNTING FOR WALL W/ DIFFERENT SURFACE FINISHES

NOTE: SIGNAGE INSTALLER RESPONSIBLE FOR ALL SIGNS TO BE MOUNTED PER ADA COMPLIANCE. THESE DRAWINGS ARE FOR REFERENCE ONLY.

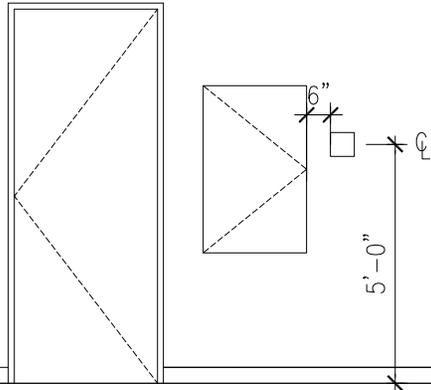


SIGN MOUNTING FOR ELEMENT ADJACENT TO DOOR.

WHEN A BUILDING ELEMENT, SUCH AS A FIRE EXTINGUISHER BOX, IS BUILT IN NEXT TO THE DOOR THE SIGN SHOULD BE MOUNTED 6" AWAY FROM BOX.

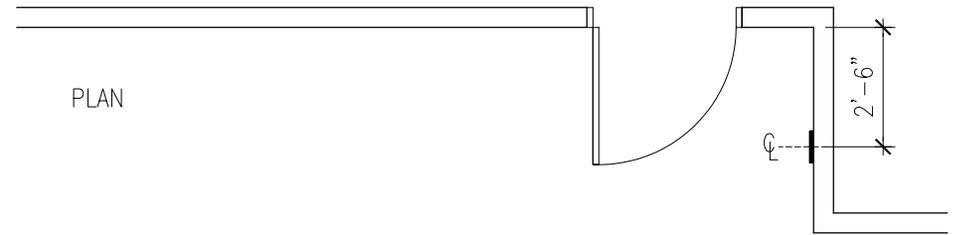

PLAN

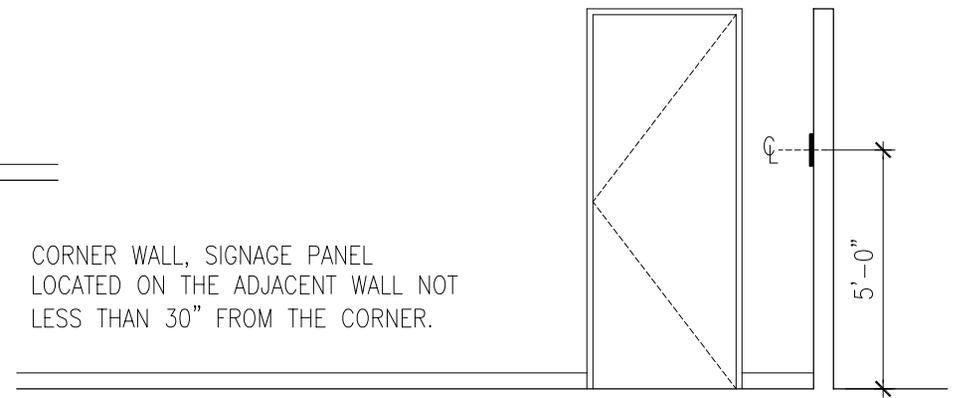

CORNER WALL, SIGNAGE PANEL LOCATED ON THE ADJACENT WALL NOT LESS THAN 30" FROM THE CORNER.

ELEVATION

SIGN MOUNTING STANDARDS

1/4" = 1'-0"

DHS003

NOTE: SIGNAGE INSTALLER RESPONSIBLE FOR ALL SIGNS TO BE MOUNTED PER ADA COMPLIANCE. THESE DRAWINGS ARE FOR REFERENCE ONLY.